

技术参数 | Technical parameters

型号	Model	LS2181
电压	Voltage	220V 50~60Hz
气压	Pressure	0.5~0.6 Mpa
功率	Power	3KW
外形尺寸	Form factor	1910*1370*1850mm
装箱尺寸	Box size	2070*1530*1350mm
净重	Net	500KG
毛重	Gross weight	550KG

*以上型号仅供参考，详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS2181

点胶机

The adhesive machine.



LENS H

浙江凌志智能科技有限公司
ZHEJIANG LENS H INTELLIGENT TECHNOLOGY CO.,LTD.


地址：宁波市海曙区光文路500号 电话(TEL): 0574-8742 3969 0574-8388 5719
Address: No 500 RD Guangwen District Haishu Ningbo Zhejiang China E-mail: wuhanqiao66@163.com web: www.lensh.cn

CE

LENS H®

应用范围 | Application


适用女士内衣 运动类高弹服饰点胶工艺
Suitable for women's underwear sports high-bounce clothing adhesive process.

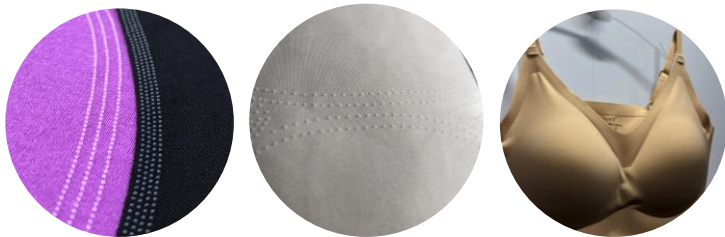

应用工艺 | Application process

应对不同工艺，提供配套选购设备及组件
Provide matching equipment and components for different processes

标配双工位（双视觉 双背光 双吸风）
Double-seat dual-vision dual-backlight double suction is standard.

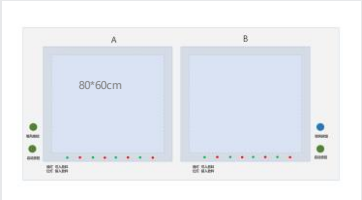

防撞保护 灯光预警提示 安全保障
Anti-collision protection Light warning alert safety and security.

远程数据采集系统（选配）
Remote data collection system (optional)



规格范围 | Specification range




高速：1.3W 胶点 / 分钟

效率分析 | Efficiency analysis

220%

传统单工位点胶机
Traditional single-seat adhesive machine.



无视觉 精度无法控制 铺料等待 效率低
No visual precision can not control the spread waiting/low efficiency.



双视觉双工位点胶机
Dual vision duplex dosing machine.



一体化系统 稳定度高 无等待
Integrated system stability is high no wait.