

技术参数 | Technical parameters


型号 Model	项目	Project	参数 Paramater
LS3171	电压	Voltage	220V 50-60Hz
	气压	Air pressure	0.5-0.6MPa
	功率	Power	2.2Kw
	外形尺寸	Dimensions	1200*600*1550mm
	装箱尺寸	Packing size	1380*780*1400mm
	净重	Net weight	120Kg
	毛重	Gross weight	150Kg

*以上型号仅供参考， 详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良， 产品规格若有变更， 恕不另行通知。为安全起见， 使用之前， 请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS3171

折边机
The folding machine

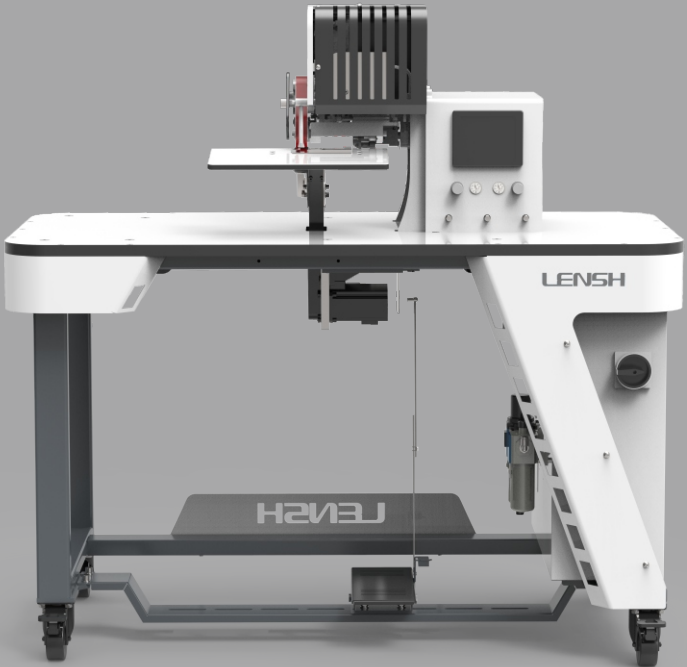

LENSH

浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719
Address:No 500 RD Guangwen District Haishu Ningbo Zhejiang,China E-mail: wuhanqiao66@163.com web:www.lensh.cn



LENSH®

应用范围 | Application

适用女士内衣 运动类高弹服饰折边工艺
Apply women's underwear sports high-bounce clothing folding technology.



规格范围 | Specification range




折边宽度： 4mm~20mm

应用工艺 | Application process

应对不同工艺之创新技术及选配组件
Innovative technologies and optional components for different processes


标配流体辅助台 推拉折边器
The fluid aid is standard with a push-pull edger.

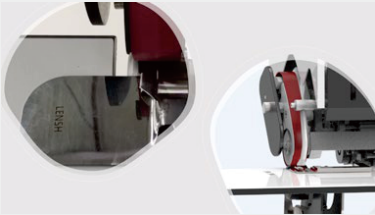

舒适操控 安全防护
Comfortable handling Safety protection.

远程数据采集系统（选配）
Remote data collection system(optional)

LSSX




故障率数据 Failure rate data
产能数据 Capacity data
使用率数据 Usage data

效率分析 | Efficiency analysis

80% 

传统折边机
Traditional folding machine.

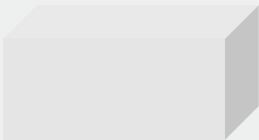

PLC程控折边机
Program-controlled folding machine.



PLC程控系统 应对不同工艺需求
Program-controlled systems address different process needs.