

技术参数 | Technical parameters


型号	Model	LS5011C
电压	Voltage	220V 50-60Hz
气压	Air pressure	0.5-0.6MPa
功率	Power	3.5Kw
外形尺寸	Dimensions	1720*980*1650mm
装箱尺寸	Packing size	1800*1140*1700mm
净重	Net weight	500Kg
毛重	Gross weight	610Kg
加热元件功率	Heating element power	2.2Kw
加热元件额定温度设定	Temperature setting of heating element	120±10℃

*以上型号仅供参考， 详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良， 产品规格若有变更， 恕不另行通知。为安全起见， 使用之前， 请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS5011C

绳头内塞打结机
Rope head inner plug knotting machine

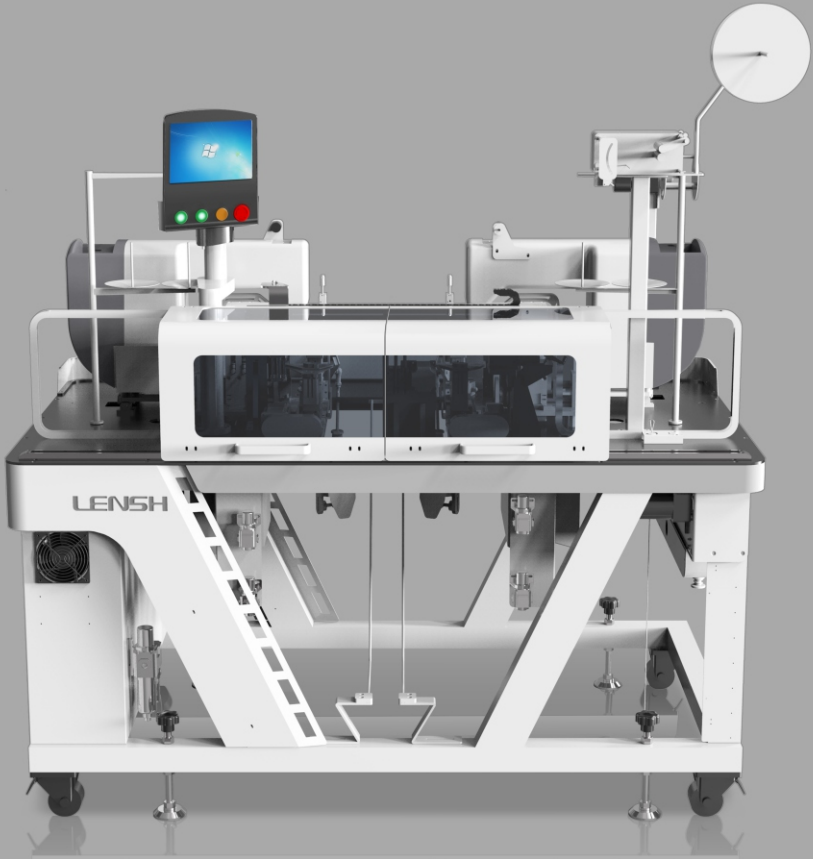

LENSH

浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719
Address:No 500 RD Guangwen District Haishu Ningbo Zhejiang,China E-mail: wuhanqiao66@163.com web:www.lensh.cn




LENSH®

应用范围 | Application


适用裤腰绳、帽绳封头打结
pants waist cords,cap cord ends bartack



规格范围 | Specification range

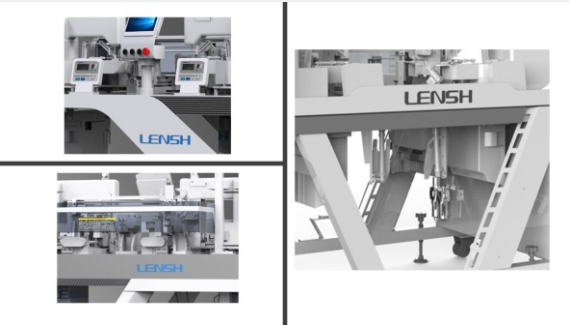

Rope length
绳长度 > 50cm



应用工艺 | Application process

应对不同工艺，提供配套选购设备及组件
provide matching equipment and components for different processes



标配内置烫平机功能
Built-in ironing machine function as standard



节省空间 增加稳定度 降低成本
Space savings Increase stability and reduce costs

远程数据采集系统（选配）
Remote data collection system(optional)

LSSX



故障率数据 Failure rate data
产能数据 Capacity data
使用率数据 Usage data

效率分析 | Efficiency analysis

400% ↑

Before 37s



量长截断
Volume-length truncation



手工内塞
Hand-stuffed



打套结
Tie knots



After 7~8s



无人化作业
unmanned operation