

技术参数 | Technical parameters

型号	Model	LS7031N	备注	Remark
电压	Voltage	220V 50~60Hz	整机分成2段 便于运输 The whole machine is divided into two segments	
气压	Air pressure	0.5~0.6MPa		
功率	Power	3.7KW		
外形尺寸	Dimensions	1950*950*1500mm		
装箱尺寸	Packing size	2050*1050*1550mm		
净重	Net weight	670kg		
毛重	Gross weight	706kg		
加热元件功率	Heating element power	3.2KW		
加热元件额定温度设定	Temperature setting of heating element	130°C±10°C		

A4 收料部分 | A4 receiving part

型号	Model	A4
电压	Voltage	220V 50~60Hz
气压	Air pressure	0.5~0.6MPa
功率	Power	0.5KW
外形尺寸	Dimensions	1400*1150*1250mm
装箱尺寸	Packing size	1500*1250*1300kg
净重	Net weight	90kg
毛重	Gross weight	108kg

*以上型号仅供参考，详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS7031N

粘切一体机

Sticking and cutting machine



LENSH

浙江凌志智能科技有限公司
ZHEJIANG LENSH INTELLIGENT TECHNOLOGY CO.,LTD.

地址：宁波市海曙区光文路500号 电话(TEL)：0574-8742 3969 0574-8388 5719
Address:No 500 RD Guangwen District Haishu Ningbo Zhejiang,China E-mail: wuhanqiao66@163.com web:www.lensh.cn

LENSH®

应用范围 | Application




主要应用POLO衫门襟智能缝制
The main application of POLO shirt intelligent sewing



应用工艺 | Application process


应对不同工艺，配置专用制具
Responding to different processes, different applications

多功能可调式制具
Multi-functional adjustable gear

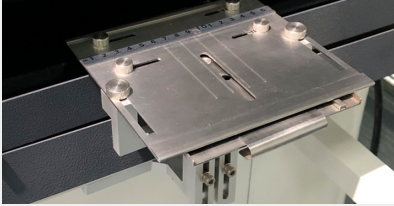


适用无需缝制的门襟、袋唇布等的加工，快速多工序合并
Suitable for the processing of placket, bag lip cloth without sewing, fast multi-process consolidation

规格范围 | Specification range

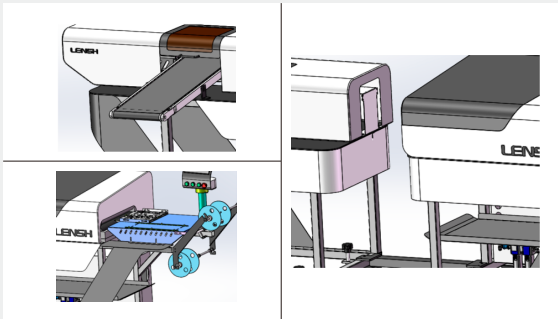

口袋唇 裤腰 门襟布加工
精度高 品质好 效率高
Pocket lip pants waist door cloth processing High precision, good quality, high efficiency.

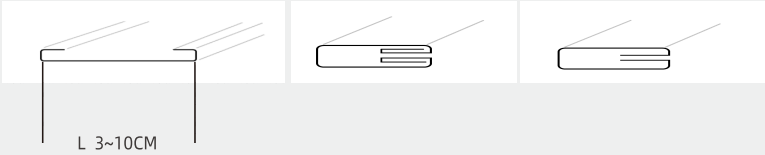


效率分析 | Efficiency analysis

800~1000%



Before 约 32s
3道工序 3个人 效率低
3 processes 3 workers low efficiency

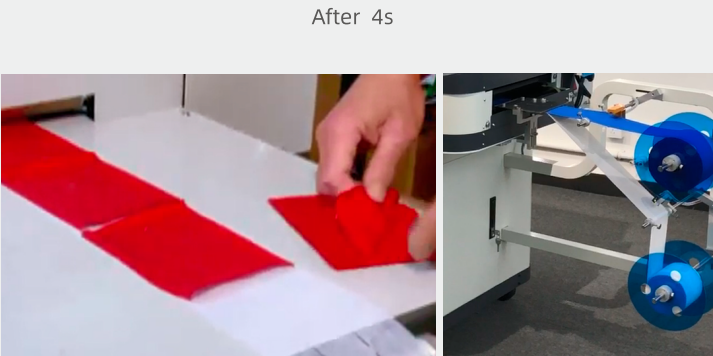

After 4s
无人化作业，自动完成
Unmanned operation, auto-completion