
动作分析 | Motion Analysis

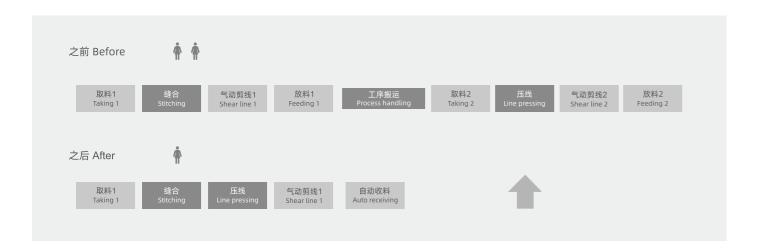

技术参数 | Technical parameters

型号 Model	项目	Project	参数 Parameter
LS7041A/B	电压	Voltage	220V 50~60Hz
	气压	Air pressure	0.5~0.6MPa
	功率	Power	3KW
	外形尺寸	Dimensions	1600*1100*1650mm
	装箱尺寸	Packing size	1525*1225*1450mm
	净重	Net weight	330kg
	毛重	Gross weight	394kg
	工作压力	Air pressure	0.45Mpa-0.75Mpa
	效率	Efficiency	15S左右/片
	适应范围 To adapt to the scope of		各类需缝合压线的工序 All kinds of stitching and pressing processes 注:弧形过大的工序不适用农片有拼接骨缝的不适用 Note: the process with too large arc is not Applicable to clothes with patchwork seam.

*以上型号仅供参考,详细情况请咨询。

The above types are only for reference, and you can consult local distributors for details.

*为了改良,产品规格若有变更,恕不另行通知。为安全起见,使用之前,请仔细阅读使用手册。 Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.



浙江凌志智能科技有限公司

地址: 宁波市海曙区光文路500号 电话(TEL): 0574-8742 3969 0574-8388 5719 Address:No 500 RD Guangwen District Haishu Ningbo Zhejiang,China E-mail: wuhanqiao66@163.com web:www.lensh.cn

LS7041A/B

缝合压线一体机(二合一) Stitching and pressure line two in one





应用范围 | Application

主要应用于各类针织梭织面料的合缝和压明线。

Mainly used in all kinds of knitted fabrics seam and press line.



应用工艺 | Application process

应对不同工艺,提供链式和锁式两款机型

Responding to different processes, it offers two models with chain and lock

LS7041A 链式 Chain type



应对针织、休闲服装的缝合压线工艺~后肩后档 侧袖 大身侧缝等 Respond to casual wear stitching and pressing process, back shoulder, bak crotch, side sleeves, side seams, etc

LS7041B 锁式 Lock type




应对针织、休闲服装的缝合压线工艺~后肩后档 侧袖 大身侧缝等 Respond to casual wear stitching and pressing process, back shoulder, bak crotch, side sleeves, side seams, etc

规格范围 | Specification range








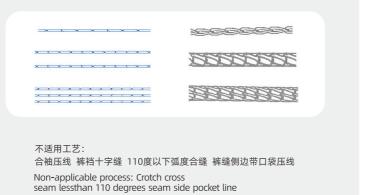

效率分析 | Efficiency analysis



2道工序 2个人 效率低 2 processes 2 workers and low efficiency

90~110%

After



缝合压线一次完成 Stitching and pressing are completed at one time

