


提供童装版组件（选配）TK01

Provide children's wear edtion components (optional) TK01



最小裤腰尺寸 50CM

minimum waist size 50cm

钢丝规格（耗材）

Steel wire specification (consumables)



GS01

标准版 折弯钢丝（大头）
应对7~8MM孔眼


Standard edition
bending steel wire(large head)
Coping with 7-8mm hole



GS02

专用版 折弯钢丝（小头）
应对5~6MM孔眼

Special edition
bending steel wire(Small head)
Coping with 5-6mm hole



GS03

定制版 模具钢丝
应对特殊绳头（塑料、金属头）

Custom edition mold steel wire
Coping with special rope head
(plastic metal head)

技术参数 | Technical parameters

型号 Model	项目 Project	参数 Parameter
LS6021/S	电压 Voltage	220V 50~60Hz
	功率 Power	0.7KW
	外形尺寸 Dimensions	1180*580*1750mm
	装箱尺寸 Packing size	1200*700*1440mm
	净重 Net weight	120kg
	毛重 Gross weight	185kg

*以上型号仅供参考，详细情况请咨询。
The above types are only for reference, and you can consult local distributors for details.

*为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

LS6021/ S

自动穿绳机
Automatic string thrusting machine



应用范围 | Application

适用于平头锁眼、鸟眼绣孔、金属气眼孔的穿绳工艺。
Suitable for flat buttom hole, bird eye embroidery hole, metal air hole string technology.



应用工艺 | Application process

应对需求，提升性能，新增6021S款
Responding to demand, improving performance, add 6021S




人性化的设计 操作简便 安全舒适 高效
Humanized design, easy to operate, safety, comfortable, efficient.



升级重点 1、电控模块化 2、齿条管一体化 3、控制数字化（产能 速度 警示）
Upgrade Focus Electric Modular Strip Tube Integration Control Digitization (Capacity Speed Warning)

规格范围 | Specification range

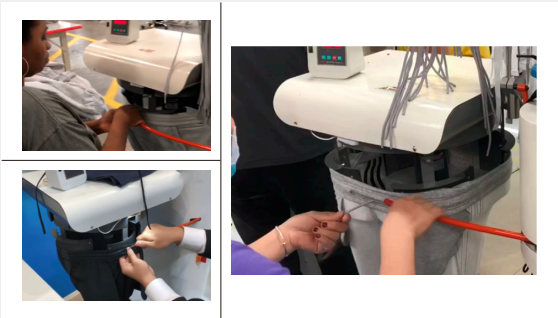


适用孔眼
Applicable hole

适用带绳
Suitable for rope




效率分析 | Efficiency analysis

80~180% ↑

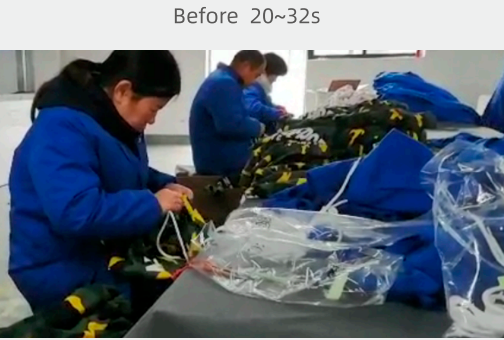

人工作业劳动强度大 效率低
Manual work quickly tired and low efficiency

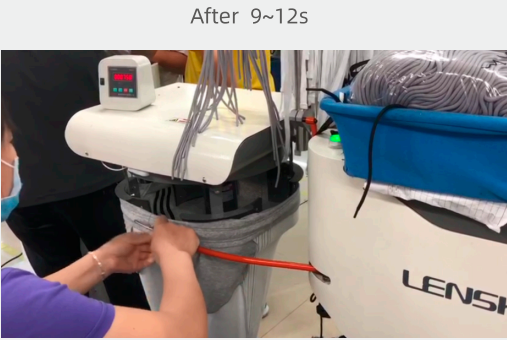

自动化设备作业，低疲劳度、效率高
Automated equipment operation, low fatigue, high efficiency